



**2027  
COMPONENTS**

**LEATT**®

THE SCIENCE OF THRILL



- 4. PEDALS
- 14. STEMS
- 24. HANDLEBARS & GRIPS
- 34. WATERBOTTLES

# PEDALS

PEDAL  
TECH

**CERAMAG**

Ceramic coated magnesium alloy improves ride  
comfort, is lightweight, strong and recyclable



## CERAMAG ALLMTN 8.0Ti FLAT

HIGH-END ULTRA LIGHTWEIGHT FLAT PEDAL WITH Ti-AXL



### MATERIAL:

- / Fully CNC-machined CeraMAG magnesium: exceptional strength-to-weight performance.
- / Advanced ceramic coating resists abrasion, fights corrosion, and maximizes durability.
- / Titanium spindle, further trims over 50g compared to our standard spindle

### PLATFORM & TRACTION :

- / Narrower pedal platform (110mm Spindle to outer edge)
- / Heavily machined to shed weight, with **tapered edges** designed to deflect impacts.
- / Replaceable Steel traction pins (10 per side, M4 and Diamond).

### SPINDLE & BEARINGS:

- / CNC-machined Titanium spindle compliant with EPAC e-MTB requirements (130 kg system weight).
- / Triple-bearing system: outboard cartridge bearing, needle bearing, and a self-lubricating inboard bushing.
- / Quad-lip seal

### INTENDED USE:

- / EFBF certified to EPAC All-Mountain Category 4
- / Designed for E-Bike, All-Mountain, and Trail applications.

### SPECIFICATIONS:

- / Size: Narrow 105 x 100mm (W x L)
- / Thickness: Center: 15mm / Edges: 17.5mm
- / Weight: 142g per pedal, 284g per pair

**CERAMAG**



## CERAMAG ALLMTN 8.0 FLAT

HIGH-END LIGHTWEIGHT FLAT PEDAL



### MATERIAL:

- / Fully CNC-machined CeraMAG magnesium, exceptional strength-to-weight performance
- / Advanced ceramic coating resists abrasion, fights corrosion, and maximizes durability.

### PLATFORM & TRACTION :

Two Platform Size Options:

- / **Wide:** Concave body with a larger yet versatile platform, Narrow: Slimmer platform enhances compatibility with smaller shoes, improves ground clearance lean angle. / **Heavily machined** to shed weight, with tapered edges designed to deflect impacts.
- / Replaceable Steel traction pins (10 per side, M4 and Diamond)

### SPINDLE & BEARINGS:

- / Forged and CNC-machined Cr-Mo spindle
- / Triple-bearing system: outboard cartridge bearing, needle bearing, and a self-lubricating inboard bushing.
- / Quad-lip seal

### INTENDED USE:

- / EFBF certified to EPAC Gravity Category 5.
- / Designed for E-Bike, Downhill, Enduro, All-Mountain, and Trail applications.

### SPECIFICATIONS:

- / Size: Wide 105 x 107mm (W x L) // Narrow 105 x 100mm (W x L)
- / Thickness: Center: 15 mm / Edges: 17.5mm
- / Weight: 170g per pedal, 340g per pair

**CERAMAG**



## ALLMTN 6.0 FLAT

EXPANDED VISION WITH NO BLIND SPOTS



### MATERIAL:

- / Fully CNC-machined 6061-T6 aluminum body

### PLATFORM & TRACTION :

Two Platform Size Options:

- / **Wide:** Concave body with a larger yet versatile platform, Narrow: Slimmer platform enhances compatibility with smaller shoes, improves ground clearance lean angle.
- / **Heavily machined** to shed weight, with **tapered edges** designed to deflect impacts.
- / Replaceable Steel traction pins (10 per side, M4 and Diamond)

### SPINDLE & BEARINGS:

- / Forged and CNC-machined Cr-Mo spindle
- / Triple-bearing system: outboard cartridge bearing, needle bearing, and a self-lubricating inboard bushing.
- / Quad-lip seal

### INTENDED USE:

- / EFBF certified to EPAC Gravity Category 5.
- / Designed for E-Bike, Downhill, Enduro, All-Mountain, and Trail applications.


### SPECIFICATIONS:

- / Size: Wide 105 x 107mm (W x L) // Narrow 105 x 100mm (W x L)
- / Thickness: Center: 15mm / Edges: 17.5mm
- / Weight: 189g per pedal, 378g per pair

## GRAVITY 4.0

PEDAL TECHNOLOGY

MID PRIVE LEVEL, FORGED & CNC'ED FLAT PEDAL WITH GRIP TUNING OPTIONS

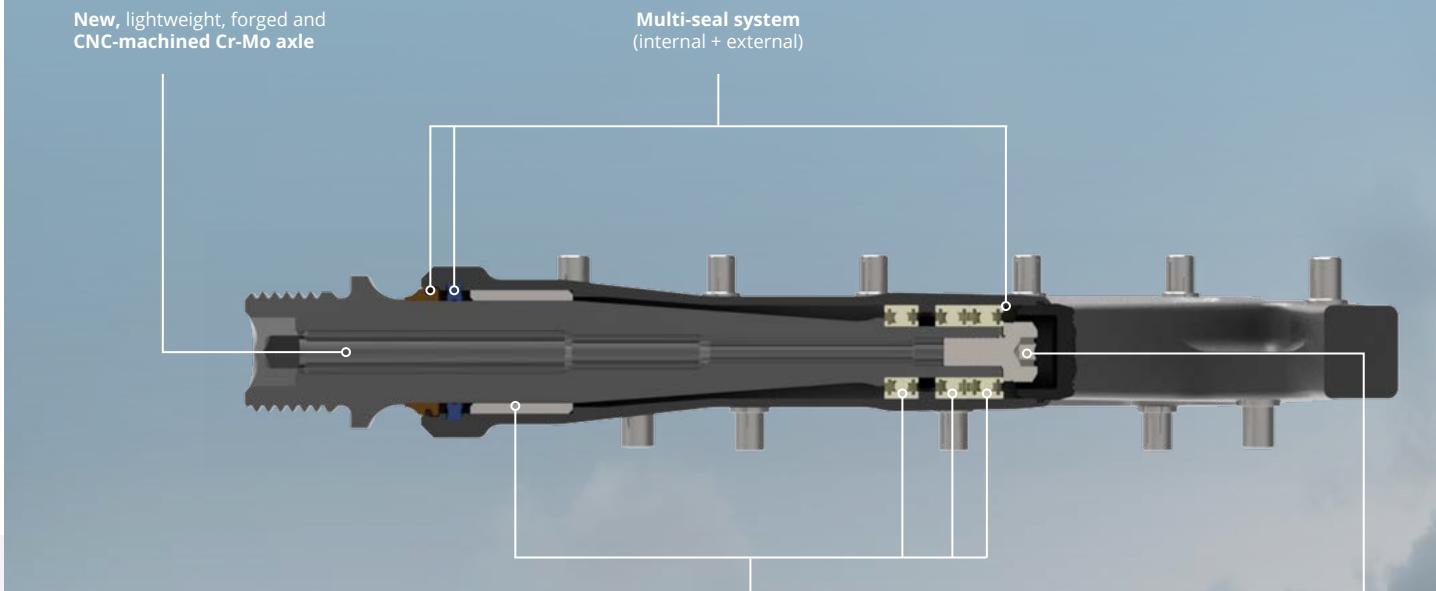

Full disassembly with a standard Allen key, **simplifying maintenance**

New **Dual-mount steel** traction pins (11 per side, M4) allow customizable grip:

- / Choice of **5.5 mm or 4 mm exposed pin height**.
- / The higher the pin, the more the grip.



## NEW GRAVITY 4.0

MID PRIVE LEVEL, FORGED & CNC'ED FLAT PEDAL WITH GRIP FINE TUNING OPTIONS



### MATERIAL:

- / Forged and CNC-machined 6061-T6 aluminum

### PLATFORM & TRACTION :

- / Low-profile, large platform design (114 x 105mm), up to 7 mm of effective concavity for superior grip and traction.
- / Dual-mount steel traction pins (11 per side, M4) allow customizable grip: 5.5 mm or 4 mm exposed pin height.
- / Top- or bottom-loading configuration for quick replacement and servicing.

### SPINDLE & BEARINGS:

- / Lightweight forged and CNC-machined Cr-Mo spindle
- / Quad-Bearing system with Triple outboard cartridge bearings plus a self-lubricating inboard bushing
- / Multi-seal system (internal + external)

### INTENDED USE:

- / Tested to certified to EPAC Gravity Category 5 standards.
- / Designed for E-Bike, Downhill, Enduro, All-Mountain, and Trail applications.

### SPECIFICATIONS:

- / Size: 114 x 105mm (W x L)
- / Thickness: Center: 10.5mm / Edges: 15.5mm
- / Weight: 200g per pedal, 400g per pair





## ALLMTN 2.0 FLAT COMPOSITE

ENTRY PRICE LEVEL COMPOSITE PEDALS WITH GOOD GRIP – NEW COLORS



**MATERIAL:**

- / Fiber-reinforced nylon composite body

**PLATFORM & TRACTION:**

- / Large concave platform (112 x 105 mm).
- / Tapered-edge design and solid construction
- / Steel traction pins (10 per side, M3).

**SPINDLE & BEARINGS:**

- / Forged and CNC-machined Cr-Mo spindle as our premium pedals.
- / Simplified maintenance, pedals can be fully disassembled with standard Allen key
- / Triple-bearing system: outboard cartridge bearing, needle bearing, and a self-lubricating inboard bushing.
- / Quad-lip seal

**INTENDED USE:**

- / Certified to EPAC Gravity Category 5 standard.
- / Designed for E-Bike, Downhill, Enduro, All-Mountain, and Trail applications.

**SPECIFICATIONS:**

- / Size: 112 x 105mm (W x L)
- / Thickness: Center: 14.5mm / Edges: 16.5mm
- / Weight: 190g per pedal, 380g per pair



## CERAMAG GRAVITY 8.0 CLIP-IN

ALUMINUM GRAVITY CLIP-IN PEDAL



**MATERIAL:**

- / Fully CNC-machined CeraMAG magnesium, exceptional strength-to-weight performance.
- / Advanced ceramic coating resists abrasion, fights corrosion, and maximizes durability.

**PLATFORM & BINDING MECHANISM:**

- / A minimalist platform that still provides lateral support to stabilize the shoe and enhance power transfer without adding bulk.
- / Dual-sided clip-in mechanism
- / Easy-to-read tension indicators
- / SPD™ compatible cleats with 5° free float

**SPINDLE & BEARINGS:**

- / Forged and CNC-machined Cr-Mo spindle
- / Triple-bearing system: outboard cartridge bearing, needle bearing, and a self-lubricating inboard bushing.
- / Quad-lip seal

**INTENDED USE:**

- / EFBE certified to EPAC Gravity Category 5 standard.
- / Designed for E-Bike, Trail, XC, and Gravel applications.

**SPECIFICATIONS:**

- / Size: 49mm x 58.5mm (W x L)
- / Thickness: Body: 20mm / Binding: 34.5mm
- / Stance: 55.5mm
- / Weight: 175g per pedal, 350g per pair

**CERAMAG**



## CERAMAG ENDURANCE 8.0TI CLIP-IN

HIGH-END SUPER-LIGHTWEIGHT RACE PEDAL TI-OPTION



**MATERIAL:**

- / Fully CNC-machined CeraMAG magnesium, exceptional strength-to-weight performance.
- / Advanced ceramic coating resists abrasion, fights corrosion, and maximizes durability.
- / Titanium spindle, further trims over 50g compared to our standard CroMoly spindle

**PLATFORM & BINDING MECHANISM:**

- / A minimalist platform that still provides lateral support to stabilize the shoe and enhance power transfer without adding bulk.
- / Dual-sided clip-in mechanism
- / Easy-to-read tension indicators
- / SPD™ compatible cleats with 5° free float

**SPINDLE & BEARINGS:**

- / CNC-machined Titanium spindle compliant with EPAC e-MTB requirements (130 kg system weight).
- / Triple-bearing system: outboard cartridge bearing, needle bearing, and a self-lubricating inboard bushing.
- / Quad-lip seal

**INTENDED USE:**

- / EFBE certified to EPAC Cross-Country Category 3 standard.
- / Designed for E-Bike, Trail, XC, and Gravel applications.

**SPECIFICATIONS:**

- / Size: 49mm x 58.5mm (W x L)
- / Thickness: Body: 20mm / Binding: 34.5mm
- / Stance: 55.5mm
- / Weight: 149g per pedal, 298g per pair

**CERAMAG**



## CERAMAG ALLNTN 8.0 CLIP-IN

HIGH-END LIGHTWEIGHT ALUMINUM RACE PEDAL



**MATERIAL:**

- / Fully CNC-machined CeraMAG magnesium, exceptional strength-to-weight performance.
- / Advanced ceramic coating resists abrasion, fights corrosion, and maximizes durability.

**PLATFORM & BINDING MECHANISM:**

- / Medium-sized platform offers solid shoe support to enhance power transfer.
- / 4 removable pins per side to customize grip.
- / Dual-sided clip-in mechanism
- / Easy-to-read tension indicators
- / SPD™ compatible cleats with 5° free float

**SPINDLE & BEARINGS:**

- / Forged and CNC-machined Cr-Mo spindle
- / Triple-bearing system: outboard cartridge bearing, needle bearing, and a self-lubricating inboard bushing.
- / Quad-lip seal

**INTENDED USE:**

- / EFBE certified to EPAC Gravity Category 5 standard.
- / Designed for E-Bike, Downhill, Enduro, All-Mountain, and Trail applications.

**SPECIFICATIONS:**

- / Size: 70.5mm x 88mm (W x L)
- / Thickness: Body: 20mm / Binding: 34.5mm
- / Stance: 55.5mm
- / Weight: 211g per pedal, 422g per pair

**CERAMAG**



## CERAMAG ENDURANCE 8.0 CLIP-IN

HIGH-END LIGHTWEIGHT ALUMINUM RACE PEDAL



**MATERIAL:**

- / Fully CNC-machined CeraMAG magnesium, exceptional strength-to-weight performance.
- / Advanced ceramic coating resists abrasion, fights corrosion, and maximizes durability.

**PLATFORM & BINDING MECHANISM:**

- / A minimalist platform that still provides lateral support to stabilize the shoe and enhance power transfer without adding bulk.
- / Dual-sided clip-in mechanism
- / Easy-to-read tension indicators

**SPINDLE & BEARINGS :**

- / Forged and CNC-machined Cr-Mo spindle
- / Triple-bearing system: outboard cartridge bearing, needle bearing, and a self-lubricating inboard bushing.
- / Quad-lip seal

**INTENDED USE:**

- / EFBE certified to EPAC Gravity Category 5 standard.
- / Designed for E-Bike, Trail, XC, and Gravel applications.

**SPECIFICATIONS:**

- / Size: 49mm x 58.5mm (W x L)
- / Thickness: Body: 20mm / Binding: 34.5mm
- / Stance: 55.5mm
- / Weight: 175g per pedal, 350g per pair

**CERAMAG**



## ALLMTN 6.0 CLIP-IN

HIGH-END LIGHTWEIGHT TR/AM PEDAL



**MATERIAL:**

- / Fully CNC-machined 6061-T6 aluminum body

**PLATFORM & BINDING MECHANISM:**

- / Medium-sized platform offers solid shoe support to enhance power transfer.
- / 4 removable pins per side to customize grip.

/ Dual-sided clip-in mechanism

/ Easy-to-read tension indicators

SPD™ compatible cleats with 5° free float

**SPINDLE & BEARINGS :**

- / Forged and CNC-machined Cr-Mo spindle
- / Triple-bearing system: outboard cartridge bearing, needle bearing, and a self-lubricating inboard bushing.

/ Quad-lip seal


**INTENDED USE:**

- / EFBE certified to EPAC EPAC Gravity Category 5 standard.

/ Designed for E-Bike, Downhill, Enduro, All-Mountain, and Trail applications

**SPECIFICATIONS:**

- / Size: 70.5mm x 88mm (W x L)
- / Thickness: Body: 20mm / Binding: 34.5mm
- / Stance: 55.5mm
- / Weight: 233g per pedal, 466g per pair

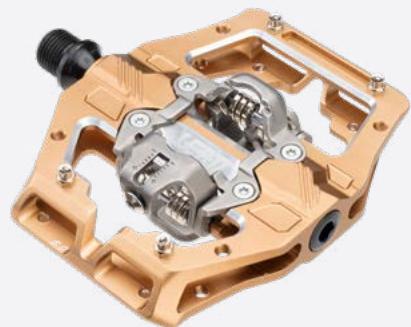

## GRAVITY 6.0 CLIP-IN

HIGH-END LIGHTWEIGHT TR/AM PEDAL



**MATERIAL:**

- / Fully CNC-machined 6061-T6 aluminum body

**PLATFORM & BINDING MECHANISM:**

- / Large-sized platform increase contact area provides exceptional support and load distribution.
- / Choose between 4 removable pins or traction pads to customize grip level and fine-tune shoe interface.

/ Dual-sided clip-in mechanism

/ Easy-to-read tension indicators

SPD™ compatible cleats with 5° free float

**SPINDLE & BEARINGS :**

- / Forged and CNC-machined Cr-Mo spindle
- / Triple-bearing system: outboard cartridge bearing, needle bearing, and a self-lubricating inboard bushing.

/ Quad-lip seal

**INTENDED USE:**

- / EFBE certified to EPAC Gravity Category 5 standard.
- / Designed for E-Bike, Downhill, Enduro, All-Mountain, and Trail applications

**SPECIFICATIONS:**

- / Size: 87.5mm x 102mm (W x L)
- / Thickness: Body: 20mm / Binding: 34.5mm
- / Stance: 57.5mm
- / Weight: 260g per pedal, 520g per pair



## ENDURANCE 6.0 CLIP-IN

HIGH-END LIGHTWEIGHT ALUMINUM RACE PEDAL



**MATERIAL:**

- / Fully CNC-machined 6061-T6 aluminum body

**PLATFORM & BINDING MECHANISM:**

- / A minimalist platform that still provides lateral support to stabilize the shoe and enhance power transfer without adding bulk.

/ Dual-sided clip-in mechanism

/ Easy-to-read tension indicators

SPD™ compatible cleats with 5° free float

**SPINDLE & BEARINGS :**

- / Forged and CNC-machined Cr-Mo spindle
- / Triple-bearing system: outboard cartridge bearing, needle bearing, and a self-lubricating inboard bushing.

/ Quad-lip seal

**INTENDED USE:**

- / EFBE certified to EPAC Gravity Category 5 standard.
- / Designed for E-Bike, Trail, XC, and Gravel applications

**SPECIFICATIONS:**

- / Size: 49mm x 58.5mm (W x L)
- / Thickness: Body: 20mm / Binding: 34.5mm
- / Stance: 55.5mm
- / Weight: 186.5g per pedal, 373g per pair

# PEDALS

2027 RANGE MATRIX

NEW 2027  
PRODUCT

NEW 2027  
COLOR

CARRY  
OVER



**Pedals CeraMAG AllMtn 8.0Ti Flat**  
**#Narrow 114x100mm CeraBone**  
9025100100



**Pedals CeraMAG AllMtn 8.0 Flat**  
**#Wide 114x107mm CeraGrey**  
9025100200



**Pedals CeraMAG AllMtn 8.0 Flat**  
**#Narrow 114x100mm CeraGrey**  
9025100210



**Pedals AllMtn 6.0 Flat**  
**#Wide 114x107mm Black**  
9025100300



**Pedals AllMtn 2.0 Flat Composite**  
**112x106mm Granite**  
9026004610



**Pedals AllMtn 2.0 Flat Composite**  
**112x106mm Vivid Orange**  
9026004620




**Pedals CeraMAG Endurance 8.0Ti Clip-in**  
**CeraBone**  
9025100400



**Pedals CeraMAG Gravity 8.0 Clip-in**  
**110x88 CeraGrey**  
9025100500



**Pedals AllMtn 6.0 Flat**  
**#Wide 114x107mm Silver**  
9025100310

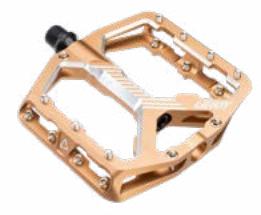

**Pedals AllMtn 6.0 Flat**  
**#Wide 114x107mm Frost Bronze**  
9025100320



**Pedals AllMtn 6.0 Flat**  
**#Narrow 114x100mm Black**  
9025100330



**Pedals AllMtn 6.0 Flat**  
**#Narrow 114x100mm Silver**  
9025100340



**Pedals CeraMAG AllMtn 8.0 Clip-in**  
**95x70mm CeraGrey**  
9025100510



**Pedals CeraMAG Endurance 8.0 Clip-in**  
**CeraGrey**  
9025100520



**Pedals Gravity 6.0 Clip-in**  
**110x88mm Black**  
9025100600



**Pedals Gravity 6.0 Clip-in**  
**110x88mm Silver**  
9025100610



**Pedals AllMtn 6.0 Flat #Narrow**  
**114x100mm Frost Bronze**  
9025100350



**Pedals Gravity 4.0 Flat**  
**114x105mm Black**  
9027020600



**Pedals Gravity 4.0 Flat**  
**114x105mm Frost Bronze**  
9027020610



**Pedals Gravity 4.0 Flat**  
**114x105mm Silver**  
9027020620



**Pedals Gravity 6.0 Clip-in**  
**110x88mm Frost Bronze**  
9025100620



**Pedals AllMtn 6.0 Clip-in**  
**95x70mm Black**  
9025100630



**Pedals AllMtn 6.0 Clip-in**  
**95x70mm Silver**  
9025100640



**Pedals AllMtn 6.0 Clip-in**  
**95x70mm Frost Bronze**  
9025100650



**Pedals AllMtn 2.0 Flat Composite**  
**112x106mm Navy Blue**  
9027020630



**Pedals AllMtn 2.0 Flat Composite**  
**112x106mm Sand Brown**  
9027020640



**Pedals AllMtn 2.0 Flat Composite**  
**112x106mm Electric Purple**  
9027020650



**Pedals AllMtn 2.0 Flat Composite**  
**112x106mm Black**  
9026004600



**Pedals Endurance 6.0 Clip-in**  
**Black**  
9025100660



**Pedals Endurance 6.0 Clip-in**  
**Silver**  
9025100670



**Pedals Endurance 6.0 Clip-in**  
**Frost Bronze**  
9025100680

# PEDAL HARDWARE

2027 RANGE MATRIX



**Pedal Pin Kit Diamond**  
40pcs Black  
9025100800



**Pedal Pin Kit Diamond**  
40pcs Silver  
9025100810



**Pedal Pin Kit dual side 5.5mm / 4mm**  
44pcs Black  
9027020700



**Pedal Pin Kit 8mm**  
40pcs Black  
9025100820



**Pedal Pin Kit 8mm**  
40pcs Silver  
9025100830



**Pedal Pin Kit comp**  
40pcs Black  
9025100870



**Pedal Cleat Kit**  
5Deg  
9025100880



**Pedal Pin Kit Clip-in 4mm**  
20pcs Silver  
9025100890



**Pedal Pin Kit Clip-in 4mm**  
20pcs Black  
9025100900



**Spindle Kit Pedals Triple-Bearing System**  
Titanium 33g/pcs 1-pair  
9025100840



**Spindle Kit Pedals Triple-Bearing System**  
Chromoly 60g/pcs 1-pair  
9025100850



**Spindle Kit Pedals Quad-Bearing System**  
Chromoly 50g/pcs 1-pair  
9027020750



**Pedal Rebuild Kit**  
Triple-Bearing System  
9025100860



**Pedal Rebuild Kit**  
Quad-Bearing System  
9027020640



A close-up, low-angle shot of a bicycle's handlebar and stem. The stem is silver and features a black, adjustable quill. The handlebar is black and appears to be made of carbon fiber. The background is a blurred green, suggesting a forest or outdoor setting.

# STEMS



## CERAMAG 8.0 Ti GRAVITY Ø35MM STEMS

HIGH-END SUPER-LIGHTWEIGHT AM/EN/DH STEM



**MATERIAL:**

- / Fully CNC-machined CeraMAG magnesium, exceptional strength-to-weight performance.
- / Advanced ceramic coating resists abrasion, fights corrosion, and maximizes durability.
- / Titanium hardware

**DESIGN & CONSTRUCTION:**

- / 210° handlebar wrap
- / Zero-gap faceplate design for easy installation and even pressure distribution.
- / 65 mm clamp width enhances steering stiffness and accuracy.
- / Steerer-tube seal cap

**INTENDED USE:**

- / EFBF certified to EPAC Gravity Category 5 standard.
- / Designed for E-Bike, Downhill, Enduro, All-Mountain, and Trail applications

**SPECIFICATIONS:**

- / Length: 33/40/50mm
- / Bar Diameter: Ø35mm
- / Rise: 0mm
- / Stack height: 38mm
- / Weight: 33mm - 100g / 40mm - 105g / 50mm - 117g

**CERAMAG**



## CERAMAG 8.0 GRAVITY Ø35 STEMS

HIGH-END LIGHTWEIGHT AM/EN/DH STEM



**MATERIAL:**

- / Fully CNC-machined CeraMAG magnesium, exceptional strength-to-weight performance.
- / Advanced ceramic coating resists abrasion, fights corrosion, and maximizes durability.

**DESIGN & CONSTRUCTION:**

- / 210° handlebar wrap
- / Zero-gap faceplate design for easy installation and even pressure distribution.
- / 65 mm clamp width enhances steering stiffness and accuracy.

**INTENDED USE:**

- / EFBF certified to EPAC Gravity Category 5 standard.
- / Designed for E-Bike, Downhill, Enduro, All-Mountain, and Trail applications

**SPECIFICATIONS:**

- / Length: 33/40/50mm
- / Bar Diameter: Ø35mm
- / Rise: 0mm
- / Stack height: 38mm
- / Weight: 33mm - 109g / 40mm - 114g / 50mm - 125g

**CERAMAG**



## 6.0 GRAVITY Ø35MM STEM

ALUMINUM AM/EN/DH STEM



**MATERIAL:**

- / Full CNC-machined 7075 aluminum

**DESIGN & CONSTRUCTION:**

- / 210° handlebar wrap
- / Zero-gap faceplate design for easy installation and even pressure distribution.
- / 65 mm clamp width enhances steering stiffness and accuracy.

**INTENDED USE:**

- / EFBF certified to EPAC Gravity Category 5 standard.
- / Designed for E-Bike, Downhill, Enduro, All-Mountain, and Trail applications

**SPECIFICATIONS:**

- / Length: 33/40/50mm
- / Bar Diameter: Ø35mm
- / Rise: 0mm
- / Stack height: 38mm
- / Weight: 33mm - 141g / 40mm - 149g / 50mm - 163g

## 4.0 GRAVITY ELEVATE STEM


PRODUCT TECHNOLOGY



FORGED AND CNC-MACHINED  
6061-T6 ALUMINUM FOR  
MAXIMUM STRENGTH AND  
DURABILITY

EXTRA-SHORT  
25 MM LENGTHS  
AND 30 MM RISE  
deliver quick, precise steering and  
position the rider in a more upright  
stance for improved control on  
steep terrain.

175 GRAMS

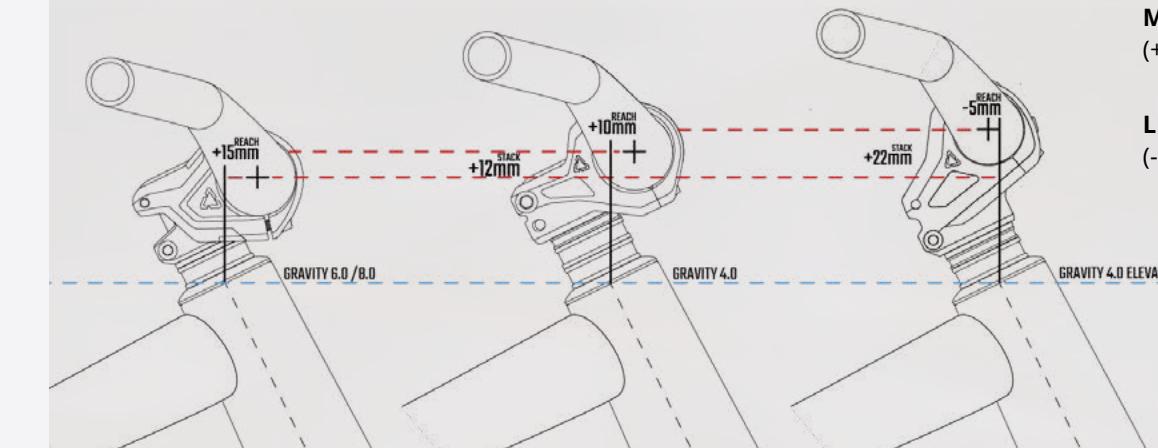

**MORE STACK / RISE**

(+22mm compared to Gravity 6.0/8.0)\*

**LESS REACH**

(-20mm compared to Gravity 6.0/8.0)\*

\* Based on a given  
steerer length



## GRAVITY 4.0 ELEVATE 31.8 STEM

ONE OF THE SHORTEST STEMS ON THE MARKET, MID PRICE LEVEL



**MATERIAL:**

- / Forged and CNC-machined from 6061-T6 aluminum

**DESIGN & CONSTRUCTION:**

- / Extra-short 25 mm length and 30mm rise, deliver quick, precise steering
- / Helps reduce reach on longer bikes
- / 60 mm clamp width for maximum steering precision.
- / Faceplate bridge increases torsional strength
- / 28 mm steerer insertion, compatible with shorter steerers.
- / Zero-gap faceplate clamp design simplifies installation, improves pressure distribution

**INTENDED USE:**

- / Certified to EPAC Gravity Category 5 standard.
- / Designed for E-Bike, Downhill, Enduro, All-Mountain, and Trail applications

**SPECIFICATIONS:**

- / Length: 25 mm
- / Bar Diameter: Ø31.8 mm
- / Rise: 30 mm
- / Maximum Steerer Insertion: 28 mm
- / Weight: 25mm - 175g

# 5.0 GRAVITY STEMS

PRODUCT TECHNOLOGY

NEW 2027  
PRODUCT



**FEA OPTIMIZED:**  
Perfect balance of weight and strength, built to exceed Gravity EPAC Class 5 performance standards.

**FULL CNC**  
and **anodized polished finish**  
for a premium look



## NEW GRAVITY 5.0 31.8 STEM

MID PRICE LEVEL, LOW STACK, FULL CNCED

EPAC  
LEVEL 5



**MATERIAL:**

/ Full CNC-machined 6061-T6 aluminum, polished and anodized

**DESIGN & CONSTRUCTION:**

/ Available in 34 mm for quick response or 44 mm to match modern fork offsets for balanced handling.  
/ 55 mm clamp balances steering control and handlebar compliance.

/ Zero-gap faceplate design for easy installation and even pressure distribution

**INTENDED USE:**

/ Certified to EPAC Gravity Category 5 standard.

/ Designed for E-Bike, Downhill, Enduro, All-Mountain, and Trail applications

**SPECIFICATIONS:**

/ Length: 34/44mm  
/ Bar Diameter: Ø31.8 mm  
/ Rise: 0mm  
/ Stack height: 32mm  
/ Weight: 34mm - 130g / 44mm - 142g

# STEMS

2027 RANGE OVERVIEW



## STEM GRAVITY 4.0

LIGHT & LOW-STACK ALLOY STEM

EPAC  
LEVEL 5

**MATERIAL:** / Forged and CNC-machined from 6061-T6 aluminum

**DESIGN & CONSTRUCTION:**

/ Match your handling preferences, now available in **three lengths**:  
• 34 mm for increased steering response  
• 44 mm matches fork offset for balanced, neutral handling  
• 54 mm for improved climbing efficiency and more predictable control

/ **Very low stack height** increases the range of height adjustment and is compatible with short steerers.  
/ **60 mm clamp width** for maximum steering precision.

/ Faceplate bridge increases torsional strength and is compatible with accessory straps.

/ **Zero-gap faceplate** clamp design

**INTENDED USE:**

/ Certified to EPAC Gravity Category 5 standard.

/ Designed for E-Bike, Downhill, Enduro, All-Mountain, and Trail applications

**SPECIFICATIONS:**

/ Length: 34/44/54mm (NEW)  
/ Bar Diameter: Ø31.8 mm  
/ Rise: 5mm  
/ Stack height: 28mm (34/44) 30mm (54mm)  
/ Weight: 34mm - 134g / 44mm - 150g / 54mm - 168g



## STEM CERAMAG ALLMTN 8.0TI 31.8

THE NEW LEVEL OF LIGHTNESS

EPAC  
LEVEL 4

**MATERIAL:** / Fully CNC-machined CeraMAG magnesium, exceptional strength-to-weight performance.

/ Advanced ceramic coating resists abrasion, fights corrosion, and maximizes durability.  
/ Titanium hardware

**DESIGN & CONSTRUCTION:**

/ One-piece body design  
/ Internally and externally machined  
/ Narrow 45 mm clamp width allows the handlebar to flex

**INTENDED USE:**

/ Certified to EPAC All-Mountain Category 4 standard

/ Designed for E-Bike, All-Mountain, Trail and XC applications

**SPECIFICATIONS:**

/ Length: 44/54/64mm  
/ Bar Diameter: Ø31.8mm  
/ Rise: 0mm  
/ Stack height: 35mm  
/ Weight: 44mm - 75g / 54mm - 86g / 64mm - 96g

**CERAMAG**



## STEM GRAVITY DM 6.0 35

HARDCORE DH DIRECT-MOUNT STEM

EPAC  
LEVEL 5

**MATERIAL:** / Full CNC-machined 7075 aluminum

**DESIGN & CONSTRUCTION:**

/ Two-piece chassis  
/ Direct-mount interface attaches directly to a triple clamp/DH fork  
/ Adjustable length and height (5 mm increments)  
/ 200° handlebar wrap provides a secure clamp interface  
/ Zero-gap faceplate and Interlocking faceplate interface design ensures easy installation and even pressure distribution across the handlebar.  
/ Wide 70 mm clamp stance delivers unmatched steering control and precision

**INTENDED USE:**

/ EFB-E certified to EPAC Gravity Category 5 standard.

/ Designed for E-Bike, Downhill applications

**SPECIFICATIONS:**

/ Length: 2-positions 45/50mm  
/ Bar Diameter: Ø35mm  
/ Rise: 0mm / +5mm with spacer  
/ Stack height: direct mount  
/ Weight: 163g

# STEMS & ACCESSORIES

2027 RANGE MATRIX

NEW 2027  
PRODUCT

NEW 2027  
COLOR

CARRY  
OVER

Stem CeraMAG Gravity 8.0Ti 35



**Stem CeraMAG Gravity 8.0Ti 35**  
#33mm Cera bone  
9025101000



**Stem CeraMAG Gravity 8.0Ti 35**  
#40mm Cera bone  
9025101010



**Stem CeraMAG Gravity 8.0Ti 35**  
#50mm Cera bone  
9025101020

Stem CeraMAG Gravity 8.0 35



**Stem CeraMAG Gravity 8.0 35**  
#33mm Cera Grey  
9025101200



**Stem Gravity 6.0 35**  
#40mm Silver  
9025101440



**Stem Gravity 6.0 35**  
#50mm Silver  
9025101450

Stem CeraMAG AllMtn 8.0Ti 31.8



**Stem Gravity 5.0 31.8**  
#34mm Black  
9027020910



**Stem Gravity 5.0 31.8**  
#44mm Black  
9027020920

Stem CeraMAG AllMtn 8.0Ti 31.8



**Stem CeraMAG Gravity 8.0 35**  
#40mm Cera Grey  
9025101210



**Stem CeraMAG Gravity 8.0 35**  
#50mm Cera Grey  
9025101220



**Stem CeraMAG AllMtn 8.0Ti 31.8**  
#44mm Cera Bone  
9026004750



**Stem CeraMAG AllMtn 8.0Ti 31.8**  
#54mm Cera Bone  
9026004760



**Stem Gravity 5.0 31.8**  
#34mm Silver  
9027020930



**Stem Gravity 5.0 31.8**  
#44mm Silver  
9027020940



**Stem Gravity 5.0 31.8**  
#34mm Frost Bronze  
9027020950



**Stem Gravity 5.0 31.8**  
#44mm Frost Bronze  
9027020960

Stem Gravity 6.0 35



**Stem CeraMAG AllMtn 8.0Ti 31.8**  
#64mm Cera Bone  
9026004770



**Stem Gravity 6.0 35**  
#33mm Black  
9025101400



**Stem Gravity 6.0 35**  
#40mm Black  
9025101410



**Stem Gravity 6.0 35**  
#50mm Black  
9025101420



**Stem Gravity 4.0 31.8 Elevate**  
#24mm + 30mm Rise Black  
9027020810



**Stem Gravity 4.0 35**  
#34mm Black  
9026004650



**Stem Gravity 4.0 35**  
#44mm Black  
9026004660



**Stem Gravity 4.0 35**  
#54mm Black  
9027020860

Stem Gravity 4.0 31.8



**Stem Gravity 6.0 35**  
#33mm Frost Bronze  
9025101460



**Stem Gravity 6.0 35**  
#40mm Frost Bronze  
9025101470



**Stem Gravity 6.0 35**  
#50mm Frost Bronze  
9025101480



**Stem Gravity 6.0 35**  
#33mm Silver  
9025101430



**Stem Gravity 4.0 35**  
#34mm Silver  
9026004680



**Stem Gravity 4.0 35**  
#44mm Silver  
9026004690



**Stem Gravity 4.0 31.8**  
#34mm Black  
9026004890



**Stem Gravity 4.0 31.8**  
#44mm Black  
9026004900

# STEMS & ACCESSORIES

2027 RANGE MATRIX



MTB HARDWARE - STEMS



Stem Gravity 4.0 31.8  
#54mm Black  
9027021010



Stem Gravity 4.0 31.8  
#34mm Silver  
9026004920



Stem Gravity 4.0 31.8  
#44mm Silver  
9026004930

Stem CeraMAG Gravity 8.0 35



Stem Gravity DM 6.0 35  
Black  
9025101800



Spacer Kit Headset  
10/5/2.5/1.5mm Frost Bronze  
9025102010



Bolt Kit Titanium  
Gravity Stems 6pcs  
9025102020



Bolt Kit Titanium AllMtn  
8.0 Stems 4pcs  
9026005020



Accessory Strap Stem  
9026005030



Top Cap Headset CeraMAG Ti  
Bolt CeraBlack  
9027021060



Top Cap Headset CeraMAG Ti  
Bolt CeraBone  
9027021070



Top Cap Headset CeraMAG Ti  
Bolt CeraGrey  
9027021080



Top Cap Headset CeraMAG  
CeraBone  
9025101920



Top Cap Headset CeraMAG  
CeraGrey  
9025101930



Top Cap Headset  
Black  
9027021090



Top Cap Headset  
Silver  
9027021100



Top Cap Headset  
Frost Bronze  
9027021110



Spacer Kit Headset CeraMAG  
10/5/2.5/1.5mm CeraBone  
9025101970



Spacer Kit Headset CeraMAG  
10/5/2.5/1.5mm CeraGrey  
9025101980



Spacer Kit Headset  
10/5/2.5/1.5mm Black  
9025101990



Spacer Kit Headset  
10/5/2.5/1.5mm Silver  
9025102000



# HANDEL BARS & GRIPS



## HANDELBAR & GRIP TECH

### REFLEX

Vibration-dampening gel that absorbs energy  
and cuts down arm fatigue

# HANDELBARS

2027 RANGE OVERVIEW

NEW 2027  
PRODUCT



## HANDLEBAR KIT LAUNCH CONTROL 6.0 Ø35MM

Ø35MM AM/EN/DH 7000 ALUMINUM BAR



### MATERIAL:

/ Variable-thickness 7050 aluminum

### DESIGN & CONSTRUCTION:

- / Extreme butting and optimized wall thickness reduce weight and improves compliance
- / Includes ReaFlex 6.0 grips with energy-absorbing ReaFlex gel, reducing vibration, decreasing hand fatigue and arm pumps.
- / 9° backsweep and 5° upsweep suit both aggressive and more relaxed riding positions.
- / Wide center clamping area accommodates stems and accessories with ease.
- / Premium two-tone finish
- / Alignment marks ensure quick, accurate stem and lever setup

### INTENDED USE:

- / Certified to EPAC Gravity Category 5 standard.
- / Designed for E-Bike, Downhill, Enduro, All-Mountain, and Trail applications

### SPECIFICATIONS:

- / Rise: 23/38mm
- / Bar Diameter: Ø35mm
- / Width: 800mm
- / Weight: Bar: 23mm - 284g / 38mm - 285g // Grips: 134g/Pair



## HANDLEBAR LAUNCH CONTROL 4.0 Ø35

HI-RISE-MADNESS



### MATERIAL:

/ Variable thickness 2014 Aluminum

### DESIGN & CONSTRUCTION:

- / Built for durability, designed to handle aggressive riding and hard impacts.
- / Available in three high-rise options for superior control and confidence on steep, technical terrain.
- / 9° backsweep and 5° upsweep suit both aggressive and more relaxed riding positions, maintaining good wrist alignment, reducing fatigue, and keeping steering crisp and controlled.
- / Laser-etched alignment marks make stem and lever setup easy and precise

### INTENDED USE:

- / Certified to EPAC Gravity Category 5 standard.
- / Designed for E-Bike, Downhill, Enduro, All-Mountain, and Trail applications

### SPECIFICATIONS:

- / Rise: 38/53/68mm
- / Bar Diameter: Ø35mm
- / Width: 800mm
- / Weight: 38mm - 322g / 53mm - 328g / 68mm - 334g



## HANDLEBAR KIT LAUNCH CONTROL 6.0 Ø31.8

NOW IN 31.8MM FOR IMPROVED COMPLIANCE



### MATERIAL:

/ Variable-thickness 7050 aluminum

### DESIGN & CONSTRUCTION:

- / Advanced butting and refined wall profiles create exceptional compliance for one of the most comfortable aluminum bars in its class.
- / Includes ReaFlex 6.0 grips with energy-absorbing ReaFlex gel, reducing vibration, decreasing hand fatigue and arm pumps.
- / 9° backsweep and 5° upsweep suit both aggressive and more relaxed riding positions.
- / Wide center clamping area accommodates stems and accessories with ease.
- / Premium two-tone finish delivers a refined, high-end look.
- / Alignment marks ensure quick, accurate stem and lever setup.

### INTENDED USE:

- / Certified to EPAC Gravity Category 5 standard.
- / Designed for E-Bike, Downhill, Enduro, All-Mountain, and Trail applications

### SPECIFICATIONS:

- / Rise: 23/38mm
- / Bar Diameter: Ø31.8mm
- / Width: 800mm
- / Weight: Bars: 23mm - 282g / 38mm - 286g // Grips: 134g/Pair

# HANDLEBAR LAUNCH CONTROL 4.0 Ø31.8

## TECHNOLOGY

SUPER SOFT & GRIPPY = RACE-DEDICATED GRIP



MORE BACKSWEET = less reach, more ergonomic wrist position, more control

MORE UPSWEET = even more rise, more ergonomic position



## NEW ||| HANDLEBAR LAUNCH CONTROL 4.0 Ø31.8

ONE OF THE SHORTEST STEMS ON THE MARKET, MID PRICE LEVEL

### MATERIAL:

/ Variable thickness 2014 Aluminum

### DESIGN & CONSTRUCTION:

- / Built for durability, designed to handle aggressive riding and hard impacts.
- / Available in three high-rise options to deliver superior control and confidence on steep, technical terrain.
- / 12° backsweep and 5° upsweep promote a natural hand-wrist alignment to reduce strain and fatigue, especially in more upright positions, while maintaining precise control.
- / Laser-etched alignment marks make stem and lever setup easy and precise.

### INTENDED USE:

- / Certified to EPAC Gravity Category 5 standard.
- / Designed for E-Bike, Downhill, Enduro, All-Mountain, and Trail applications

### SPECIFICATIONS:

- / Rise: 38/53/68mm
- / Bar Diameter: Ø31.8 mm
- / Width: 800mm
- / Weight: 38mm - 320g / 53mm - 326g / 68mm - 332g



## REAFLEX 6.0 OG

### UNIQUE DAMPING AND GRIP CHARACTERISTICS

#### DESIGN & CONSTRUCTION

- / Reaflex vibration-absorbing gel noticeably reduces hand fatigue and arm pump.
- / Available in **thin** and **regular diameters** to perfectly match your hand size and desired cushioning feel.
- / Shore 25A TPR compound overlay to maximize durability.
- / Single inboard aluminum lock ring.
- / Central bump pad palm support reduces hand fatigue and improves impact protection.
- / Waffle and triangular tread blocks provide extra traction and control.
- / Variable-diameter taper helps reduce hand pressure during long rides.
- / Soft, flexible ribs around the thumb and forefinger enhance comfort.
- / Bump-protection bar ends.


#### INTENDED USE

- / Ideal for **E-Bike, Downhill, Enduro, All-Mountain, and Trail** applications.

#### SPECIFICATIONS

- / Length: 135 mm
- / Outer Diameter: Thin: Ø29/31mm // Regular: Ø31/33mm
- / Inner Diameter: Ø22.2 mm
- / Weight: Thin: 126g // Regular: 134g

**REAFLEX**

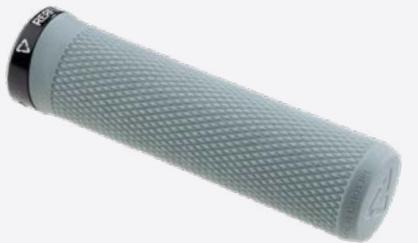

## REAFLEX 6.0 DIAMOND

### UNIQUE DAMPING AND GRIP CHARACTERISTICS

#### DESIGN & CONSTRUCTION

- / Reaflex vibration-absorbing gel noticeably reduces hand fatigue and arm pump.
- / Available in **thin** and **thick diameters** to perfectly match your hand size.
- / Soft Shore 15A TPR compound overlay for improved tactile feel and balanced durability.
- / Single inboard aluminum lock ring.
- / Diamond texture pattern ensures reliable traction and precise control.
- / Variable-diameter taper helps reduce hand pressure during long rides.
- / Bump-protection bar ends.

#### INTENDED USE

- / Ideal for **E-Bike, Downhill, Enduro, All-Mountain, and Trail** applications.

#### SPECIFICATIONS

- / Length: 135 mm
- / Outer Diameter: Thin: Ø29/31mm // Thick: Ø33/35mm
- / Inner Diameter: Ø22.2 mm
- / Weight: Thin: 100g // Thick: 138g

**REAFLEX**



## REAFLEX 6.0 HALF WAFFLE

### UNIQUE DAMPING AND GRIP CHARACTERISTICS

#### DESIGN & CONSTRUCTION

- / Reaflex vibration-absorbing gel noticeably reduces hand fatigue and arm pump.
- / Soft Shore 15A TPR compound overlay for balanced durability.
- / Single inboard aluminum lock ring.
- / Diamond texture pattern ensures reliable traction and precise control.
- / Strategically placed finger ribs improve finger placement and enhance handling control.
- / Half-flange profile aids consistent hand positioning.
- / Variable-diameter taper helps reduce hand pressure during long rides.
- / Soft, flexible ribs around the thumb and forefinger enhance comfort.
- / Bump-protection bar ends

#### INTENDED USE

- / Ideal for **E-Bike, Downhill, Enduro, All-Mountain, and Trail** applications.

#### SPECIFICATIONS

- / Length: 135 mm
- / Outer Diameter: Ø31 mm
- / Inner Diameter: Ø22.2 mm
- / Weight: 122 g

**REAFLEX**

## HALF WAFFLE SUPERTACK COMPOUND

### TECHNOLOGY

#### SUPER SOFT & GRIPPY = RACE-DEDICATED GRIP



## NEW ||| REAFLEX 6.0 SUPERTACK HALF WAFFLE

### SUPER SOFT & GRIPPY, RACE-DEDICATED GRIP



#### DESIGN & CONSTRUCTION

- / **SUPER TACK compound** delivers ultra-sticky traction and control with or without gloves, wearing slightly faster but gripping noticeably better.
- / Reaflex vibration-absorbing gel noticeably reduces hand fatigue and arm pump.
- / Single inboard aluminum lock ring.
- / Diamond texture pattern ensures reliable traction and precise control.
- / Strategically placed finger ribs improve finger placement and enhance handling control.
- / Half-flange profile aids consistent hand positioning.
- / Variable-diameter taper helps reduce hand pressure during long rides.
- / Soft, flexible ribs around the thumb and forefinger enhance comfort.
- / Bump-protection bar ends

#### INTENDED USE

- / Ideal for **E-Bike, Downhill, Enduro, All-Mountain, and Trail** applications.

#### SPECIFICATIONS

- / Length: 135 mm
- / Outer Diameter: Ø31 mm
- / Inner Diameter: Ø22.2 mm
- / Weight: 122 g

**SUPERTACK REAFLEX**

Handlebar Kit Launch Control 6.0 Ø35mm



Handlebar Kit Launch Control 6.0  
Ø35mm #Mid 23/9°/800mm  
Blast Black  
9025102100



Handlebar Kit Launch Control 6.0  
Ø35mm #Hi 38/9°/800mm  
Blast Black  
9025102110



Handlebar Kit Launch Control 6.0  
Ø35mm #Mid 23/9°/800mm  
Blast Silver  
9025102120



Handlebar Kit Launch Control 6.0  
Ø35mm #Hi 38/9°/800mm  
Blast Silver  
9025102130



Handlebar Kit Launch Control 6.0  
Ø31.8 #Mid 23/9°/800mm  
Blast Silver  
9026005160



Handlebar Kit Launch Control 6.0  
Ø31.8 #Hi 38/9°/800mm  
Blast Silver  
9026005170

Handlebar Launch Control 4.0 Ø31.8



Handlebar Launch Control 4.0  
Ø31.8 #Hi 38/12°/800mm  
Blast Black  
9027021290



Handlebar Launch Control 4.0  
Ø31.8 #X-HI 53/12°/800mm  
Blast Black  
9027021300

Handlebar Launch Control 4.0 Ø35



Handlebar Kit Launch Control 6.0  
Ø35mm #Mid 23/9°/800mm  
Frost Bronze  
9026005040



Handlebar Kit Launch Control 6.0  
Ø35mm #Hi 38/9°/800mm  
Frost Bronze  
9026005050



Handlebar Launch Control 4.0 Ø35  
#Hi 38/9°/800mm  
Blast Silver  
9027021200



Handlebar Launch Control 4.0 Ø35  
#X-HI 53/9°/800mm  
Blast Silver  
9027021210



Handlebar Launch Control 4.0  
Ø31.8 #XX-HI 68/12°/800mm  
Blast Black  
9027021310



Grips ReaFlex 6.0 OG  
#Thin Ø29mm Black  
9025102300



Grips ReaFlex 6.0 OG  
#Thin Ø29mm Lava  
9025102310



Grips ReaFlex 6.0 OG  
#Thin Ø29mm Peanut  
9025102320

Handlebar Kit Launch Control 6.0 Ø31.8



Handlebar Launch Control 4.0 Ø35  
#XX-HI 68/9°/800mm  
Blast Silver  
9027021220



Handlebar Launch Control 4.0 Ø35  
#Hi 38/9°/800mm  
Blast Black  
9026005080



Handlebar Launch Control 4.0 Ø35  
#X-HI 53/9°/800mm  
Blast Black  
9026005090



Handlebar Launch Control 4.0 Ø35  
#XX-HI 68/9°/800mm  
Blast Black  
9026005100



Grips ReaFlex 6.0 OG  
#Thin Ø29mm Granite  
9025102330



Grips ReaFlex 6.0 OG  
#Regular Ø31mm Black  
9025102340



Grips ReaFlex 6.0 OG  
#Regular Ø31mm Lava  
9025102350



Grips ReaFlex 6.0 OG  
#Regular Ø31mm Peanut  
9025102360

Handlebar Kit Launch Control 6.0



Handlebar Kit Launch Control 6.0  
Ø31.8 #Mid 23/9°/800mm  
Frost Bronze  
9027021230



Handlebar Kit Launch Control 6.0  
Ø31.8 #Hi 38/9°/800mm  
Frost Bronze  
9027021240



Handlebar Kit Launch Control 6.0  
Ø31.8 #Mid 23/9°/800mm  
Blast Black  
9026005140



Handlebar Kit Launch Control 6.0  
Ø31.8 #Hi 38/9°/800mm  
Blast Black  
9026005150



Grips ReaFlex 6.0 OG  
#Regular Ø31mm Granite  
9025102370



Grips ReaFlex 6.0 Diamond  
#Thin Ø29mm Vivid Orange  
9027020960



Grips ReaFlex 6.0 Diamond  
#Thin Ø29mm Navy Blue  
9026004890



Grips ReaFlex 6.0 Diamond  
#Thin Ø29mm Tie-Dye Purple  
9026004900



Grips ReaFlex 6.0 Diamond  
#Thin Ø29mm Rock Red  
9027021390



Grips ReaFlex 6.0 Diamond  
#Thin Ø29mm Black  
9026005300



Grips ReaFlex 6.0 Diamond  
#Thin Ø29mm Granite  
9026005310



Grips ReaFlex 6.0 Diamond  
#Thin Ø29mm Gum  
9026005320



Grips ReaFlex 6.0 Half Waffle  
#Thin Ø30mm Gum  
9026005380



Grips ReaFlex 6.0 SuperTack Half Waffle  
#Thin Ø30mm Black  
9026005380



MTB 6.0 grip Collars  
Grips ReaFlex 6.0 SuperTack Half Waffle



Collars Grip 6.0 Black  
9026005500



Collars Grip 6.0 Silver  
9026005510



Grips ReaFlex 6.0 Diamond  
#Thick Ø33mm Vivid Orange  
9027021440



Grips ReaFlex 6.0 Diamond  
#Thick Ø33mm Navy Blue  
9027021450



Grips ReaFlex 6.0 Diamond  
#Thick Ø33mm Tie-Dye Purple  
9027021460



Grips ReaFlex 6.0 Diamond  
#Thick Ø33mm Rock Red  
9027021470



Collars Grip 6.0 Frost Bronze  
9026005520



Grips ReaFlex 6.0 Diamond  
#Thick Ø33mm Black  
9026005330



Grips ReaFlex 6.0 Diamond  
#Thick Ø33mm Granite  
9026005340



Grips ReaFlex 6.0 Diamond  
#Thick Ø33mm Gum  
9026005350



Grips ReaFlex 6.0 Half Waffle  
#Thin Ø30mm Navy Blue  
9027021520



Grips ReaFlex 6.0 Half Waffle  
#Thin Ø30mm Tie-Dye Purple  
9027021530



Grips ReaFlex 6.0 Half Waffle  
#Thin Ø30mm Rock Red  
9027021540



Grips ReaFlex 6.0 Half Waffle  
#Thin Ø30mm Black  
9026005360



Grips ReaFlex 6.0 Half Waffle  
#Thin Ø30mm Granite  
9026005370





# WATER BOTTLES

WATER BOTTLE  
TECH

**FIDLICK**

Fidlock magnetic closure system

# WATER BOTTLES

2027 RANGE OVERVIEW



## BOTTLE DUOVALVE 600 FIDLOCK

MAX-FLOW BOTTLE

### DESIGN & CONSTRUCTION:

- / FIDLOCK Cageless magnetic interlocking system, Side-entry mounting.
- / Dual-valve construction combines a high-flow self-sealing spout with an **anti-vacuum valve** that **equalizes internal pressure** for faster bottle reset and smoother re-insertion.
- / Self-sealing spout prevents leaks and can be fully closed.
- / Easy to disassemble for thorough cleaning.
- / TasteRight plastic is odorless and free from aftertaste.
- / Available with or without the **FIDLOCK bike base**.

### SPECIFICATIONS

- / Volume: 600ml
- / Length: 222mm
- / Weight: 127g

**FIDLOCK**



## BOTTLE STEADYSIP CONVERTIBLE 600 FIDLOCK

STEADYSIP NOW ALSO IN A POPULAR FIDLOCK VERSION

### DESIGN & CONSTRUCTION:

- / FIDLOCK Cageless magnetic interlocking system, Side-entry mounting.
- / Upright drinking minimizes head movement and helps you keep your eyes on the trail.
- / Our **triple-valve system** pairs the self-sealing **Hydrapak BLASTER™ bite valve** with **internal and anti-vacuum valves** to deliver safe, effortless sipping, a steady flow of water, and faster bottle reset.
- / Includes **Hydrapak tube extension** for **easy drinking with a full-face helmet**.
- / TasteRight plastic is odorless and free from aftertaste.
- / Available with or without the **FIDLOCK bike base**.

### SPECIFICATIONS

- / Volume: 600ml
- / Length: 238mm
- / Weight: 133g

**FIDLOCK**  **Hydrapak**



## BOTTLE DUOVALVE

MAX-FLOW BOTTLE

### DESIGN & CONSTRUCTION:

- / Dual-valve construction combines a high-flow self-sealing spout with an **anti-vacuum valve** that **equalizes internal pressure** for faster bottle reset and smoother re-insertion.
- / Self-sealing spout prevents leaks and can be fully closed.
- / Easy to disassemble for thorough cleaning.
- / TasteRight plastic is odorless and free from aftertaste.
- / Available with or without the **FIDLOCK bike base**.
- / Available in **600ml** and **750ml** versions.

### SPECIFICATIONS

- / Volume: 600ml // 750ml
- / Length: 600ml - 191mm // 750ml - 239mm
- / Weight: 600ml - 56g // 750ml - 58g



## BOTTLE STEADYSIP CONVERTIBLE

SAFETY-ENHANCING MAX-FLOW BOTTLE

### DESIGN & CONSTRUCTION:

- / Upright drinking minimizes head movement and helps you keep your eyes on the trail.
- / Our **triple-valve system** pairs the self-sealing **Hydrapak BLASTER™ bite valve** with **internal and anti-vacuum valves** to deliver safe, effortless sipping, a steady flow of water, and faster bottle reset.
- / Includes **Hydrapak tube extension** for **easy drinking with a full-face helmet**.
- / TasteRight plastic is odorless and free from aftertaste.
- / Available in **600ml** and **750ml** versions.

### SPECIFICATIONS

- / Volume: 600ml / 750ml
- / Length: 600ml - 202mm // 750ml - 250mm
- / Weight: 600ml - 66g // 750ml - 69g

 **Hydrapak**

# WATER BOTTLES

2027 RANGE MATRIX



**Bottle SteadySip Convertible**  
**600 Fidlock Smoke**  
9026005600



**Bottle SteadySip Convertible**  
**600 Fidlock W/Bike Base Smoke**  
9026005610



**Bottle SteadySip Convertible**  
**750 Clear**  
9026005700



**Bottle SteadySip Convertible**  
**750 Smoke**  
9025102500



**Bottle SteadySip Convertible**  
**600 Clear**  
9026005710



**Bottle SteadySip Convertible**  
**600 Smoke**  
9025102520



**Bottle DuoValve**  
**600 Fidlock Smoke**  
9026005800



**Bottle DuoValve**  
**750 Clear**  
9026005900



**Bottle DuoValve**  
**750 Smoke**  
9025102600



**Bottle DuoValve**  
**600 Clear**  
9026005910



**Bottle DuoValve**  
**600 Smoke**  
9025102620





USA

Tel: 661 287 9258

Toll Free: 1.800.691.3314

Fax: 661.287.9688

Website: [www.leatt.com](http://www.leatt.com)

Questions: [info@leatt.com](mailto:info@leatt.com)

Warranty: [USAAuth@Leatt.com](mailto:USAAuth@Leatt.com)

Dealer Inquiries (US): [Info@Leatt.com](mailto:Info@Leatt.com)



THE SCIENCE OF THRILL